

# Aquam8512A

8+4G/9+3G port layer 3 managed PoE IP65/67 EN50155 switches



## » Overview

The Aquam8512A series switches, specially designed for rail industries, support up to 8 Fast Ethernet interfaces and 4 Gigabit uplink interfaces, support panel mounting, support a wide range of operation temperature(-40°C to 75°C), and meets the EN50155, EN50121 and other rail transit industry standard. The switches support IP67 protection class to meet the requirements of dustproof and waterproof performance, and support M12 interface form to ensure the tightness and the firmness of the connection port, which especially suitable for application that are subject to high vibration and shock.

The Aquam8512A series switches support PoE function, support Isolated power supply of a wide range (Power input range is up to 24VDC-110VDC), provide 9 fast Ethernet M12 ports with 9 IEEE 802.3at PoE+ (compatible with IEEE802.3af) ports, and can be used to power up to 9 IEEE 802.3at compliant powered devices (PDs), eliminating the need for additional wiring. The switches are classified as power source equipment (PSE) and provide maximum PoE power up to 30 watts per port and a total of 60 watts for the whole PoE port.

The Aquam8512A series switches support Layer 3 routing protocols such as OSPF v2.0, and supports IGMP protocol and PIM protocol to implement multicast routing, support DHCP protocols for automatic IP address assignment, and support DRP, DT Ring and RSTP ring network redundancy protocol for flexible networking in order to meet the market demand of railway. The switches can be widely used in PIS, CCTV, video monitoring system and train control system, also apply to any other industrial applications of harsh vibration and shock, and high EMC compatibility.

## » Key Features

Supports a maximum of 3 10/100/1000Base-TX and 9 10/100Base-TX ports or 4 10/100/1000Base-TX and 8 10/100Base-TX ports, and support a maximum 9 PoE ports.

Supports X-coded M12 connector with Gigabit ports, and D-coded M12 connector with 100M ethernet ports

Supports optional bypass function

Supports DT-Ring protocols and RSTP/MSTP,DRP ring network redundancy protection and VRRP

Supports Layer 3 routing protocols such as OSPF v2.0

Complies with IEC61375 standard, supports TTDP(Train Topology Discovery Protocol)

Complies with the requirements of EN50155 and EN50121 industrial standards

IP67 protection class

## Product Specifications

### >Software Functions

#### -Switching

Supports VLAN,PVLAN

Supports port trunking

Supports port flow control

Supports speed limit, broadcast storm control

#### -Redundancy

Supports VRRP

Supports DT-ring, DT-ring+, DT-VLAN with the recovery time<50ms

Supports DRP, with the recovery time<20ms

Supports RSTP/MSTP

#### -Multicast

Supports IGMP-snooping

Supports GMRP

Supports static multicast

#### -Routing

Supports OSPF v2.0

Supports static routing

Supports IGMP

Supports PIM-SM, PIM-DM

### **-Network Security**

Supports IEEE 802.1x

Supports HTTPs/SSL, SFTP Client

Supports SSH

Supports RADIUS

Supports TACACS+

Supports user classification

### **-Service Quality**

Supports ACL

Supports 802.1p, TOS/DiffServ, Supports SP,WRR queue scheduling

### **-Management and Maintenance**

Supports Console,Telnet,WEB management methods

Supports SNMPv1/v2c/v3,Kyvision centralized management

Supports software upgrade by FTP/TFTP

Supports RMON

Supports IP/MAC conflict alarm, power supply alarm, port alarm, ring alarm

Supports port mirroring

Supports Syslog

Supports LLDP

### **-IP Management**

Supports DHCP server/ client/snooping option 82

### **-Clock management**

Supports SNTP Client

### **-Characteristic function**

Supports power failure bypass function

Supports TTDP protocol(pending)

Supports R-NAT(pending)

Supports Auto-Configuration Backup(pending)

**>Technical Parameter**

**-Standard**

IEEE 802.3i(10Base-T)

IEEE 802.3u(100Base-TX)

IEEE 802.3ab(1000Base-T)

IEEE 802.3x(Flow control)

IEEE 802.1p(Class of Service)

IEEE 802.1Q(VLAN)

IEEE 802.1s(MATP)

IEEE 802.1w(RSTP)

IEEE 802.1X

IEC 61375-2-5

**-Switch Properties**

Priority Queues 8

Number of VLANs 4K

VLAN ID 1-4093

Number of Multicast Groups 256

Routing Table 3.9K

MAC Table 16K

Packet Buffer 12Mbit

Packet Forwarding Rate 7.1Mpps

Switching Delay <10us

**-Interface**

Gigabit Port 10/100/1000Base-T(X), M12 connector

Fast Ethernet Port 10/100Base-T(X), M12 connector

Console Port RS232, M12 connector

USB M12 connector

**-LED**

LEDs on Front Panel

Running LED: Run

Power LED: PWR1,PWR

Interface LED: Link/ACT

POE LED: ACT(POE models only)

USB LED: USB

### **-Power Requirements**

Power Input

Non-PoE models: 24VDC, 48VDC, 110VDC

PoE models: 24-110VDC

Power Terminal M12-4pin connector

Power Consumption

Non-PoE models: <16 W without PoE

PoE models: <80W with 60W PoE

Overload Protection Support

Reverse Connection Protection Support

Redundancy Protection Support

### **-Physical Characteristics**

Housing Metal

Cooling Nature cooling, fanless

Protection Class IP67

Dimensions 142mm×100mm×110mm(H×W×D)

Weight <2Kg

Mounting panel mounting

### **-Environmental Limits**

Operating Temperature -40 to +75°C

Storage Temperature -40 to +85°C

Ambient Relative Humidity 5 to 95% (non-condensing)

### **-Warranty**

MTBF 764615h

Warranty Period 5 years

### **-Approvals**

CE, FCC, EN50121, EN50155, EN45545, EN60950

### **-Industrial Standard**

EMI

FCC CFR47 Part 15, EN55022/CISPR22, Class A

EMS

IEC61000-4-2 (ESD)  $\pm 6\text{kV}$  (contact),  $\pm 8\text{kV}$  (air)

IEC61000-4-3 (RS)  $20\text{V/m}$  (80MHz-2GHz)

IEC61000-4-4 (EFT) Power Port:  $\pm 2\text{kV}$ ; Data Port:  $\pm 2\text{kV}$

IEC61000-4-5 (Surge) Power Port:  $\pm 1\text{kV/DM}$ ,  $\pm 2\text{kV/CM}$

IEC61000-4-6 (CS)  $10\text{V}$  (150kHz-80MHz)

IEC61000-4-8 (Power frequency magnetic field)  $50\text{Hz}$   $100\text{A/m}$

IEC61000-4-9 (Pulsed magnetic field)  $300\text{A/m}$

IEC61000-4-29 (Voltage Short interruptions)  $10\text{ms}$   $100\%$

Safety


EN60950-1

Machinery

IEC61373 (Vibration and Shock)

IEC60068-2-32 (Free Fall)

## **Mechanical Drawing**

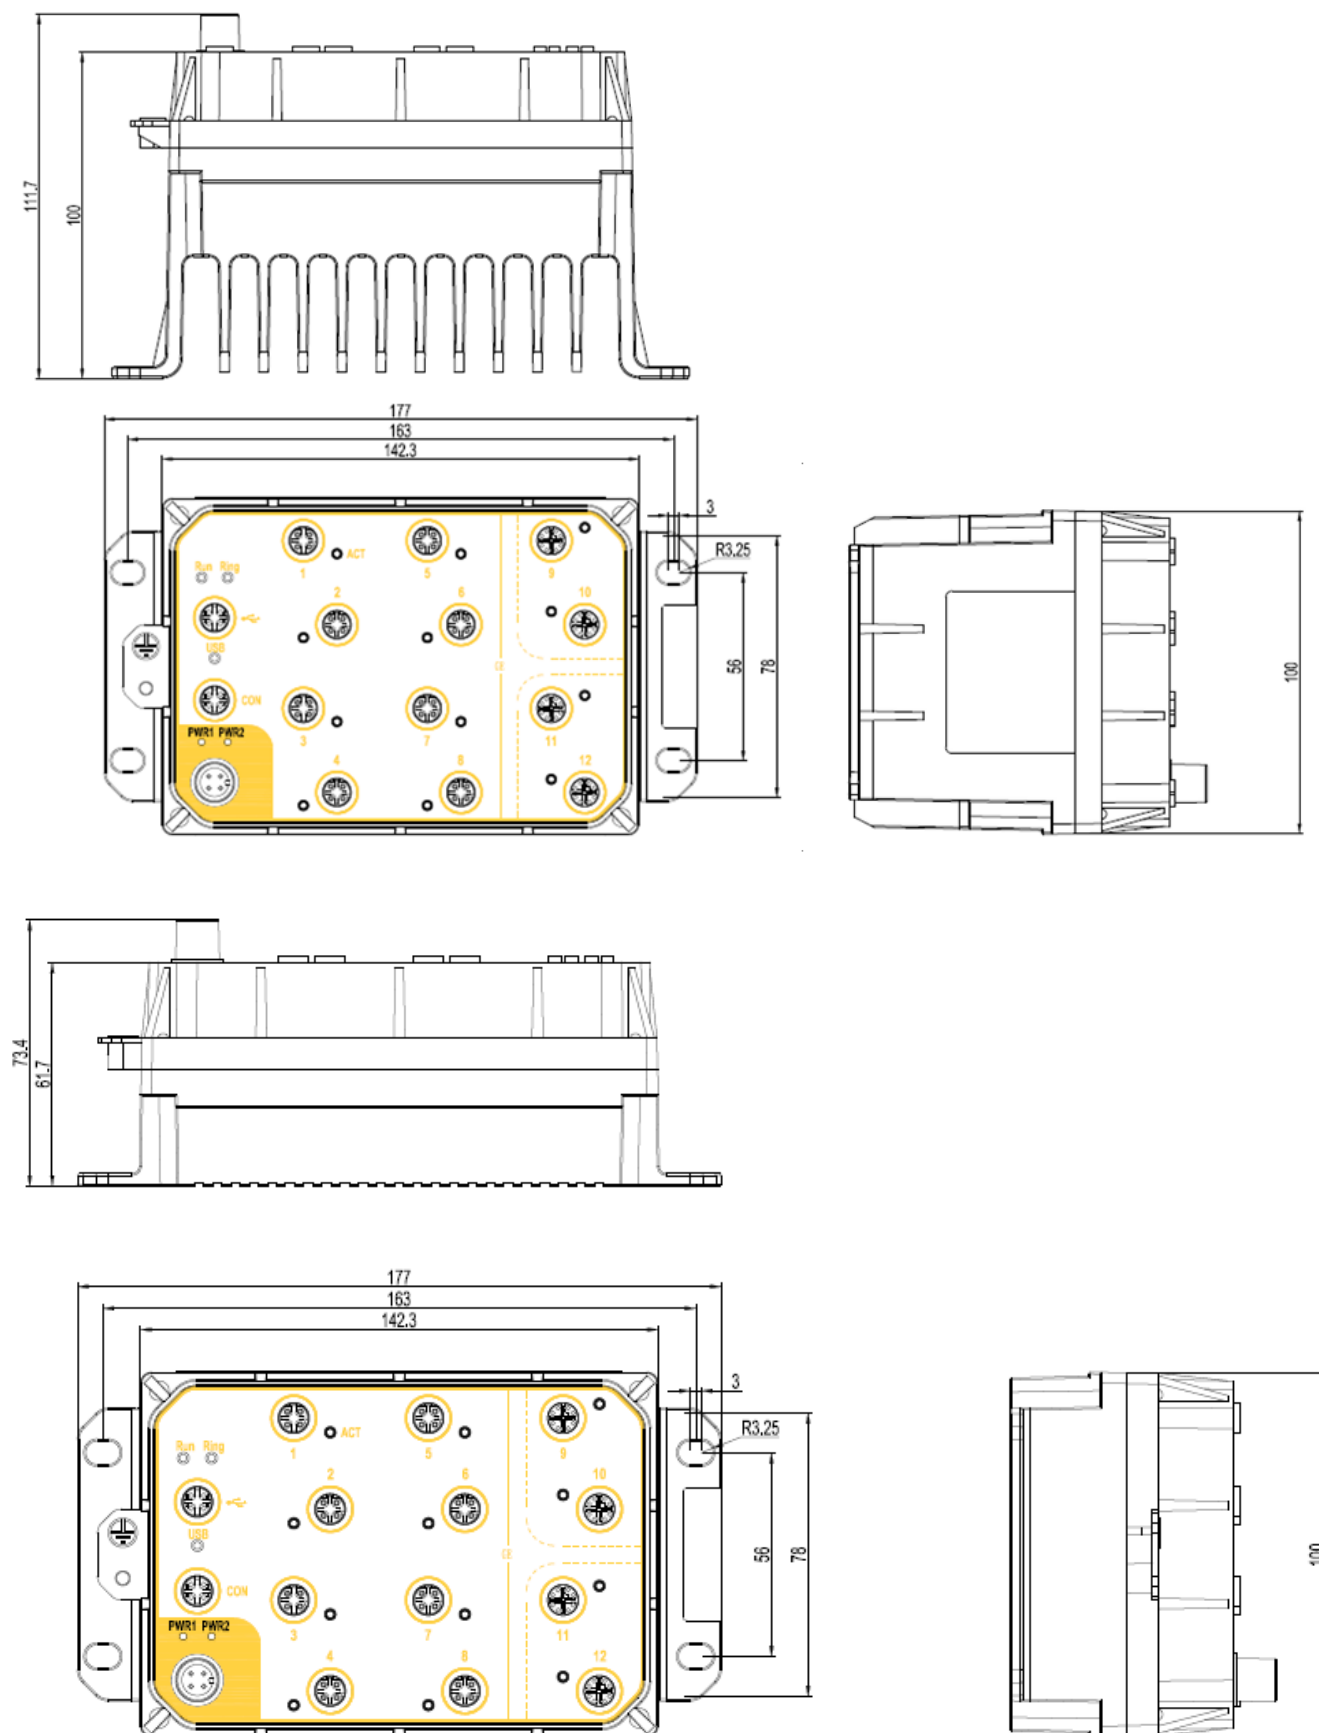

## Ordering Information

## Models with cooling fin

Product Model Aquam8512A-Ports-PS1-PS2

Code Definition Ordering Codes

Ports  
 3GE9T=3 X 10/100/1000BASE-T(X) M12 port; 9 X 10/100BASE-T(X) M12 port;  
 4GE8T=4 X 10/100/1000BASE-T(X) M12 port; 8 X 10/100BASE-T(X) M12 port;  
 3GE9P=3 X 10/100/1000BASE-T(X) M12 port; 9 X 10/100BASE-T(X) M12 PoE port;  
 4GE8P=4 X 10/100/1000BASE-T(X) M12 port; 8 X 10/100BASE-T(X) M12 PoE port;  
 9T=9 X 10/100BASE-T(X) M12 port;  
 9P=9 X 10/100BASE-T(X) M12 PoE port;

Product Model Aquam8512A-B-Ports-PS1-PS2

B:  
 4x 1000M ports support 2 pairs of Bypass function for Models with gigabit ports;  
 3x 1000M ports support 1 pair of Bypass function for Models with gigabit ports;  
 Ports:  
 3GE9T=3 X 10/100/1000BASE-T(X) M12 port; 9 X 10/100BASE-T(X) M12 port;  
 4GE8T=4 X 10/100/1000BASE-T(X) M12 port; 8 X 10/100BASE-T(X) M12 port;  
 3GE9P=3 X 10/100/1000BASE-T(X) M12 port; 9 X 10/100BASE-T(X) M12 PoE port;  
 4GE8P=4 X 10/100/1000BASE-T(X) M12 port; 8 X 10/100BASE-T(X) M12 PoE port;  
 Non-PoE :  
 PS1-PS2: Power  
 Supply  
 H6-H6=72-110VDC(50.4-137.5VDC),redundant inputs  
 L14-L14=48VDC(33.6-60VDC),redundant inputs  
 L13-L13=24VDC(16.8-30VDC),redundant inputs  
 PoE :  
 WV-WV=24-110VDC(16.8-154VDC),redundant inputs

## Models without cooling fin

Product Model Aquam8512A-Ports-PS1-PS2-LV

Ports:  
 3GE9T=3 X 10/100/1000BASE-T(X) M12 port; 9 X 10/100BASE-T(X) M12 port;  
 4GE8T=4 X 10/100/1000BASE-T(X) M12 port; 8 X 10/100BASE-T(X) M12 port;  
 9T=9 X 10/100BASE-T(X) M12 port;

Product Model Aquam8512A-B-Ports-PS1-PS2-LV



B: 4x 1000M ports support 2 pairs of Bypass function for Models with gigabit ports;  
3x 1000M ports support 1 pair of Bypass function for Models with gigabit ports;

Ports 3GE9T=3 X 10/100/1000BASE-T(X) M12 port; 9 X 10/100BASE-T(X) M12 port;  
4GE8T=4 X 10/100/1000BASE-T(X) M12 port; 8 X 10/100BASE-T(X) M12 port;

PS1-PS2: Power Supply H6-H6=72-110VDC(50.4-137.5VDC), redundant inputs  
L14-L14=48VDC(33.6-60VDC), redundant inputs  
L13-L13=24VDC(16.8-30VDC), redundant inputs

**Accessories**

M12-A-4P-F Female cable connector with M12, A-Coding, 4 Pin; Power interface Connector  
M12-A-4P-M Male cable connector with M12, A-Coding, 4 Pin; Console or USB interface Connector  
M12-D-4P-M Male cable connector with M12, D-Coding, 4 Pin; 10/100Base-TX interface Connector  
M12-X-8P-M Male cable connector with M12, X-Coding, 8 Pin; 10/100/1000Base-TX Connector  
DT-XL-PWR-M12-XXX-3m 3m connecting line with M12 connector for power ports (from M12 to the exposed end); Power cable with M12 connector

Version:2020-10-21 14:15:27